COMBO. BURG/FIRE

Gemini C-Series
Combo Burg/Fire Kits

255

GEMC-COMBO255KT
- 24V Panel, 255 Points, max., 4 on board NACs, 8 partitions, 7 Amp, 24V Power Supply
  - Built in horn/strobe synch. module/NAC
  - Built in dual line communicator
  - Quickloader up/downloading & smoke detector sensitivity reporting
- Burg. Module, with power supply
- Large Red Enclosure, flush or surface mount. Up to 32Ah battery backup.
- GEMC-FK1 LCD Fire Keypad mounts anywhere on bus (Also, full keyswitch support)

128

GEMC-COMBO128KT

Kit as above, but with
- 24V Panel, 128 Points, max.
- 4 on board NACs

32

GEMC-COMBO32KT

Kit similar to above, but with
- 24V Panel, 32 Points, max.
- 2 on board NACs

COMMERCIAL FIRE

Firewolf Series
Commercial Fire Kits

255

GEMC-FW-255KT
- 24V Panel, 255 Points, max., 7 Amp, 24V Power Supply
  - 4 on board NACs, for 6.5A notification power
  - Built in horn/strobe synch. module/NAC
  - Built in dual line communicator
  - Quickloader up/downloading & smoke detector sensitivity reporting
- Large Red Enclosure, flush or surface mount.Up to 32Ah battery backup.
- GEMC-FK1 LCD Fire Keypad mounts anywhere on bus (Also, full keyswitch support)

128

GEMC-FW-128KT

Kit as above, but with
- 24V Panel, 128 Points, max.
- 4 on board NACs, for 6.5A notification power

32

GEMC-FW-32KT

Kit similar to above, but with
- 24V Panel, 32 Points, max.
- 2 on board NACs, for 4A notification power
- Medium Red Enclosure, flush or surface mount. Up to 16Ah battery backup.

32

GEMC-FW32CONVKT
- 32pt GEMC Conventional Fire System Kit, ***ideal for sprinkler/waterflow apps.*** 24V Panel, 32 Points via commercial addressable, wireless or conventional fire devices, 4 on board NACs providing up to 6.5A notification power
- Locking, Medium Red Enclosure, 16x17" door, with 14.25"x16" base. Houses up to 16Ah batt'ys.
- 4 Amp, 24V Power Supply
- Conventional 8-zone 2-wire fire input module, for conventional 2-wire smokes or any conventional fire detection device (GEMC-F8ZCPIM)
- GEMC-FK1 LCD Fire Keypad mounts anywhere on bus (Also, full keyswitch support)

COMMERCIAL BURG.

Napco
Commercial Burglary Kit

96

GEMC-BURG96KT
- 96pt GEMC Addressable Commercial Burglary System Kit 24V Panel,96 Points via commercial addressable, wireless or conventional burg. devices, 7 partitions
- Locking, Medium White Enclosure, 16 x 17" door, with 14.25" x 16" base. Houses up to 16Ah battery backup.
- 4 Amp, 24V Power Supply
- Addressable SLC Burg Module, supports up to 96 addressable SLC burg devices (GEMC-BSLC)

NAPCO | COMMERCIAL

GEMC & FIREWOLF SYSTEM COMPONENTS

Platform supports commercial analog, addressable, wireless or conventional fire or burglary devices.

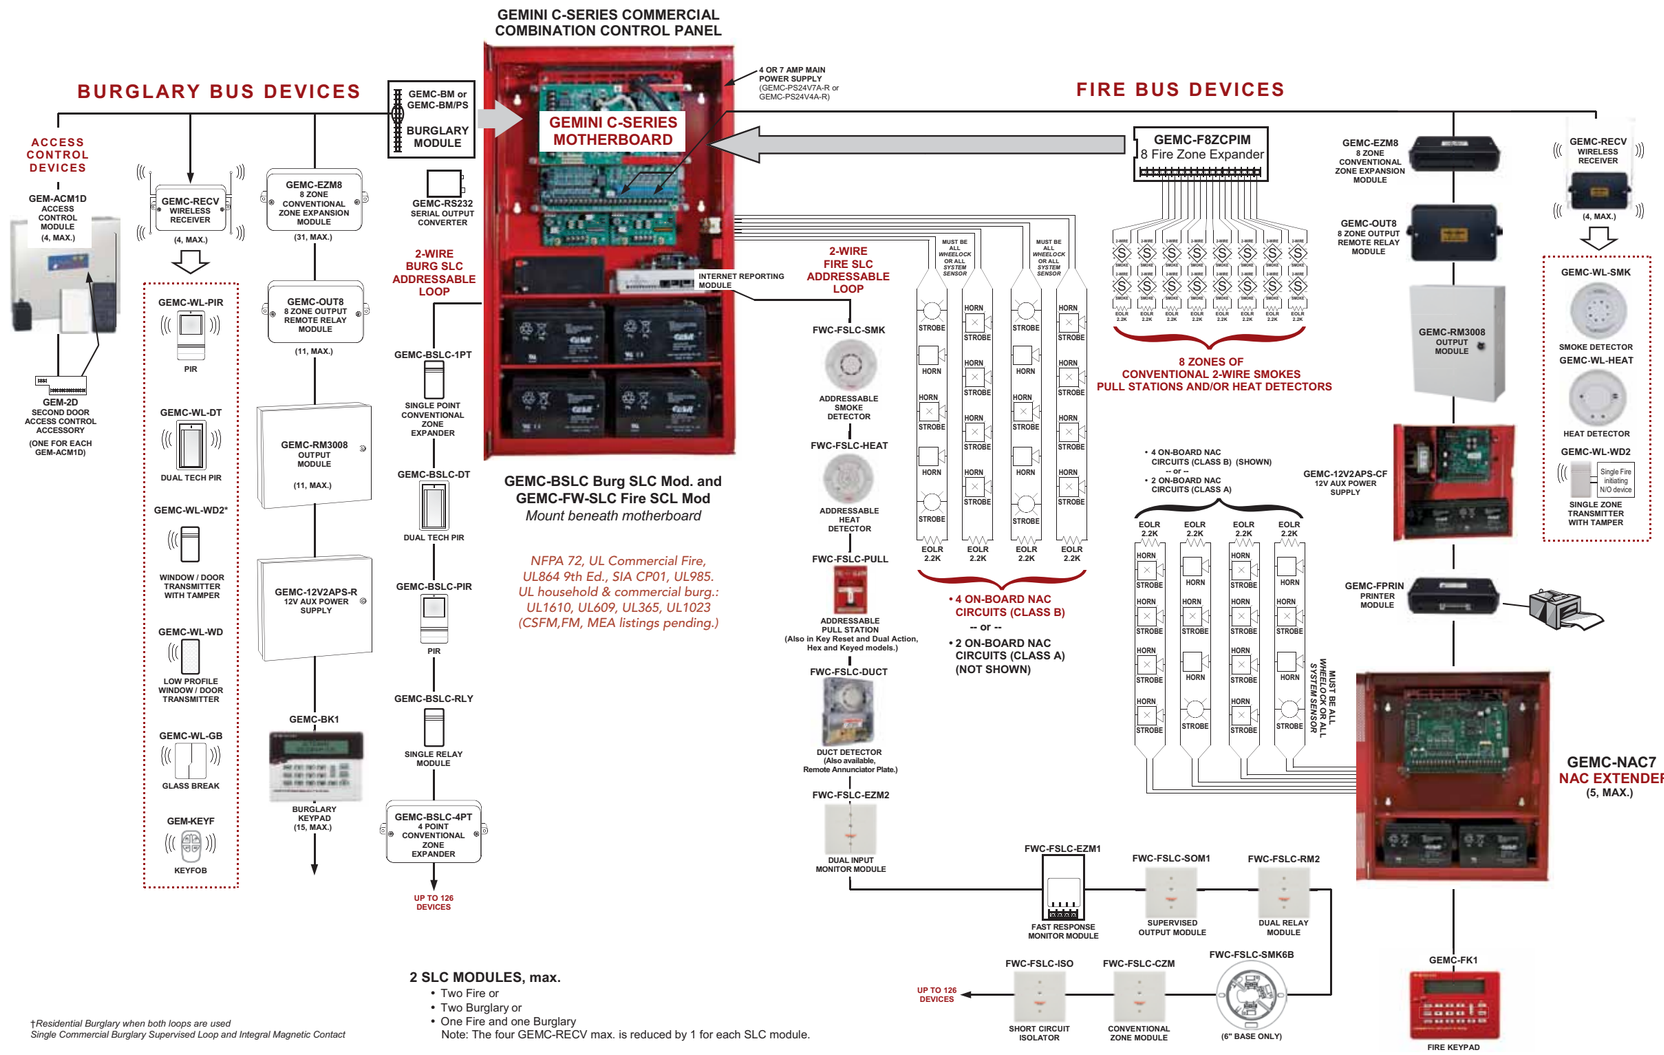

†Residential Burglary when both loops are used
Single Commercial Burglary Supervised Loop and Integral Magnetic Contact

Commercial Fire & Burglary Accessories and Options

GEMC-BM/PS Burg Module with 12V power
GEMC-BM Burg Module, isolated 4-wire burg bus
GEMC-FW-SLC Addressable 128pt Fire Module, (2/sys)
GEMC-BSLC burg version of above
GEMC-F8ZCPIM Conventional 8-zone 2-wire fire input mod.

Burglary Peripherals

GEMC-BK1 LCD Burglary Keypad w/ 4-zone EZM
GEMC-BSLC-4PT Addressable 4pt expander
GEMC-BSLC-1PT Addressable 1pt expander
GEMC-BSLC-DT Addressable 40' Dual Tech
GEMC-BSLC-PIR Addressable 50' PIR
GEMC-BSLC-RLY Addressable 1pt. output mod.
GEMC-WL-PIR Wireless 50' PIR
GEMC-WL-GB Wireless Glassbreak
GEMC-WL-DT Wireless 40' Dual Tech

Fire Peripherals

GEMC-FK1 LCD Fire Red Keypad
GEMC-WL-SMK Wireless Smoke, Photoelectric
GEMC-WL-HEAT Wireless Heat, 135° F

Common Combo. or Comm'l Fire System Peripherals

GEMC-WL-WD Wireless 1-pt input mod.
GEMC-WL-WD2† Wireless 2-input mod.
GEMC-REVC Wireless 255 point RF Receiver (4/sys)
GEMC-EZM8 8-pt expander
GEMC- FPRINT Parallel printer mod
GEMC-RM3008 8 Form C Relay Output Mod
GEMC-NL-MOD Internet Reporting Mod
GEMC-RS232 RS232 Adapter for serial output
GEMC-OUT8 PGM 8-Output Module
GEMC-KOTAMPERKT Merchantile Tamper Kit

Firewolf Addressable Peripherals

FWC-FSLC-SMK Addressable Analog Smoke, head**
FWC-FSLC-HEAT Addressable Analog Heat, head**
FWC-FSLC-SMK6B ** Smoke/Heat 6" Base
FWC-FSLC-DUCT Addressable Analog Duct smoke detector
FWC-FSLC-DUCTRA Remote Indicator Plate with LED indicator & key reset.
FWC-FSLC-EZM2 Addressable 2-zone convl expansion mod
FWC-FSLC-EZM1 Addressable 1-input convl mod
FWC-FSLC-CZM Addressable single mod, for dry contacts
FWC-FSLC-RM2 Addressable 2-output mod
FWC-FSLC-ISO Addressable Short Circuit Mod (Optional)
FWC-FSLC-SOM1 Addressable Fire supervised output mod (ex. elevator recall)
FWC-FSLC-PULL Addressable Pull Station
FWC-FSLC-PULLK Addressable Pull Station,key reset
FWC-FSLC-PROG2 Tool for address-programming SLC devices
FWC-FSLC-SMK6B * Smoke/Heat 6" Base, required for FWC-FSLC-SMK and –HEAT devices

Options

GEMC-12V2APS-CF 12VDC Power Supply for Fire Bus, remote supervised.
GEMC-12V2APS-R 12VDC Power Supply for Burg. Bus, remote supervised.
GEMC-NAC6 Remote 4-output NAC Extender
GEM-ACM1D Access Control Module (with power supply, provision for back up battery, in enclosure, plug-in transformer), 1 door kit
GEM-2D Access Add-on 2 door plug–in PCB for expansion of door capacity in above.

NAPCO © 5/2011