

4.5"


7.75"

GEMC-EZM8 WIRING DIAGRAM REFER TO WI1683 FOR ADDITIONAL WIRING AND PROGRAMMING INFORMATION.




NAPCO SECURITY SYSTEMS, INC
AMITYVILLE, N.Y. 11701

CURRENT= 60 mA
VOLTAGE =
12.5 - 7.5VDC

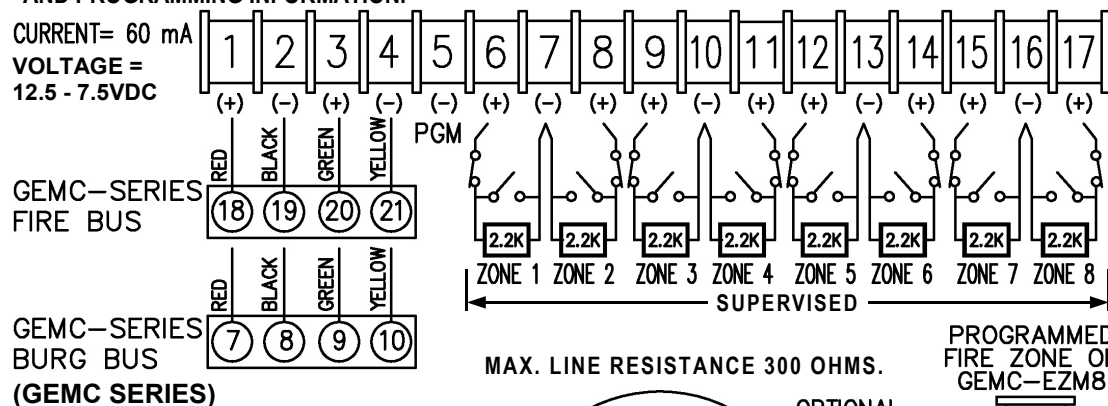


NAPCO EOLR2.2K




WIRE RANGE 12-22 AWG
MAX. 2 WIRES PER TERMINAL.


UL COMMERCIAL FIRE
LISTED EOLR (12V NOMINAL)



4 WIRE
SMOKE
DETECTOR



LA2740



PROGRAMMED
FIRE ZONE ON
GEMC-EZM8

POWER FROM
MOTHERBOARD

12VDC REGULATED

[CONFIG.]	[BASE ADDR.]	
8	7	6
5	4	3
2	1	
1		
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		

Zones Rated 10.5-6VDC, 4.7-5.5mA;
PGM Rated 12VDC @5mA.

INDOOR / DRY LOCATION USE ONLY